



2021

Lumi Lighting

www.neslight.com

NES Light
SMART SOLUTION




























Lumi Lighting


CONTENTS

- P3. Product List
- P4. Lumi Lighting Info
- P5. Installation
- P6. Linear Solution
- P7. Square 33 x 60
- P8. Square 40 x 67
- P9. Square 54 x 70
- P10. Square 79 x 77
- P11. Square 105 x 70
- P12. Square 123 x 35
- P13. Recessed 55 x 35
- P14. Recessed 69 x 35
- P15. Recessed 94 x 35
- P16. Wall Mount 128 x 43
- P17. Tube 60
- P18. Tube 90
- P19. Tube 120

Lumi Lighting is iterated and upgraded based on the Linear LED Light design with more corner accessories added to achieve more creative styles.

Product List

Series	Model	Drawing	size (inch)	Installation	Coating	Standard extender	Customizable corners	CCT				Flexible strip
LLS	LLS3360		1.3 × 2.36 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -0.6"
	LLS4067		1.57 × 2.63 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -0.78"
	NEW LLS5470(F)		2.12 × 2.75 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -1.33"
	LLS7977		3.1 × 3 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8420-24V -2.32"
	LLS10570		4.13 × 2.75 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8560-24V -3.34"
	NEW LLS12335		4.84 × 1.37 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8560-24V -3.34"
LLE	LLE5535		2.16 × 1.37 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -0.78"
	LLE6935		2.7 × 1.37 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -1.33"
	LLE9435		3.7 × 1.37 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8420-24V -2.04"
LLC	LLC12843		5.04 × 1.69 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -0.78"
LLT	LLT60		φ 2.36 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8280-24V -0.78"
	LLT90		φ 3.54 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8160-24V -0.59"
	LLT120		φ 4.72 × 98.4					1900 K 3500 K	2300 K 4000 K	2700 K 5000 K	3000 K 6000 K	D8350-24V -2.28"

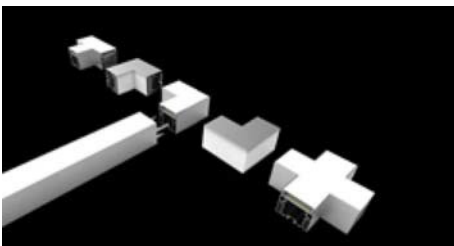


Connectors

Multiple optional standard connectors, and any other special angle (L-shape, T-shape, X-shape and wide angles) can be customized; Seamless connection with appealing design.




Flexible Diffuser

Flexible diffuser, 50m/roll, cutting freely, ultra-long application without connection gap.

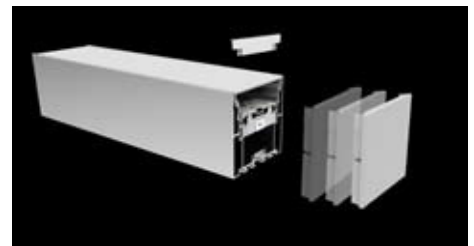

Magnetic End Cap

Magnetic absorption design, connect in seconds; Minimalist and trendy appearance without screws.

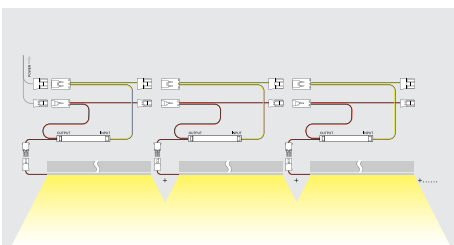

Integrated Track Cabling

After using integrated track cabling, during the ultra-long interconnection, electrical connection can be completed through the insertion of the inner connectors, without multiple wires exposed to the outside, beautiful overall effect.




Professional Matching Tool

Professional matching tool of diffuser installing, using for ultra-long application of pendant, surface mounted, save time and complete easily.


Installation

Few product has a different installation setting

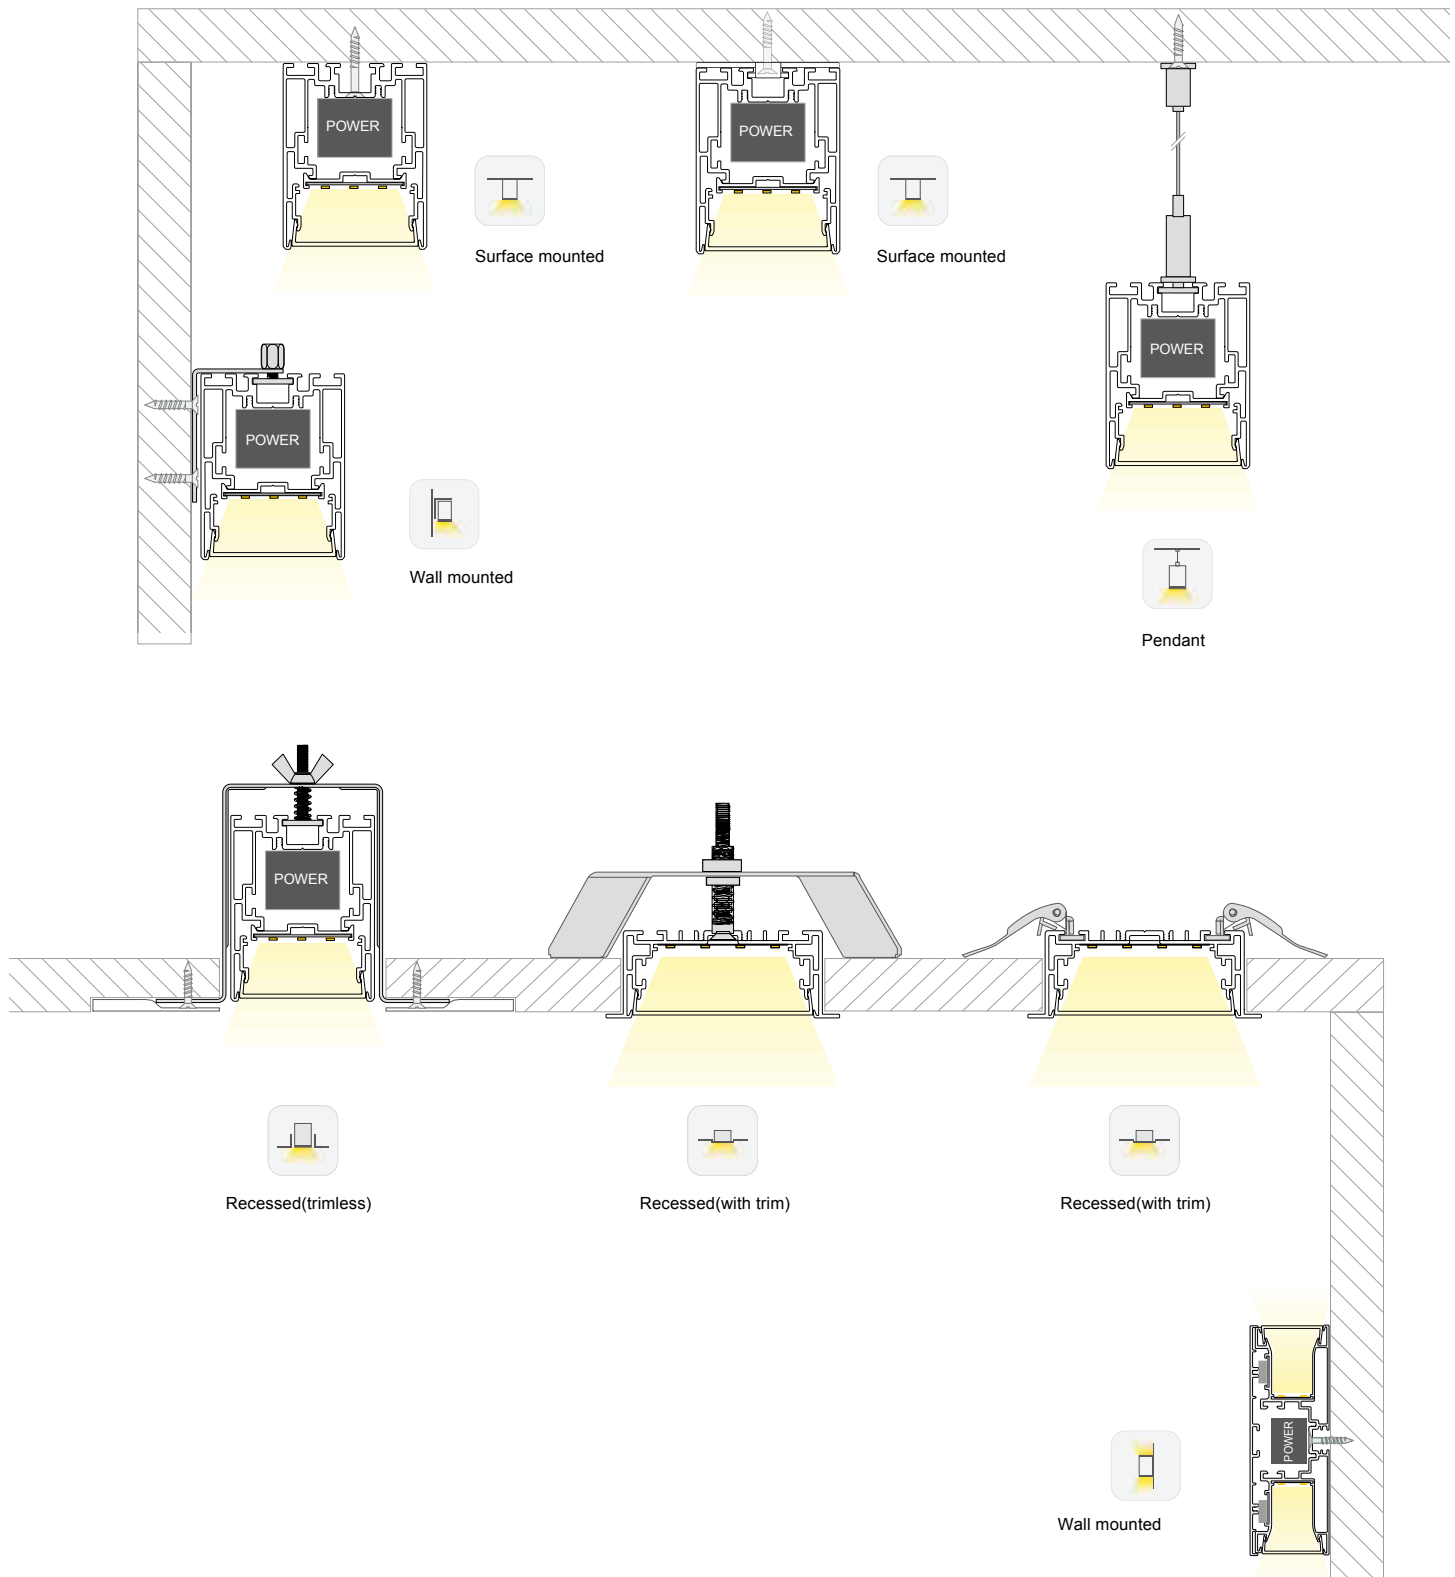

Linear Solution


Few product has a different solution setting

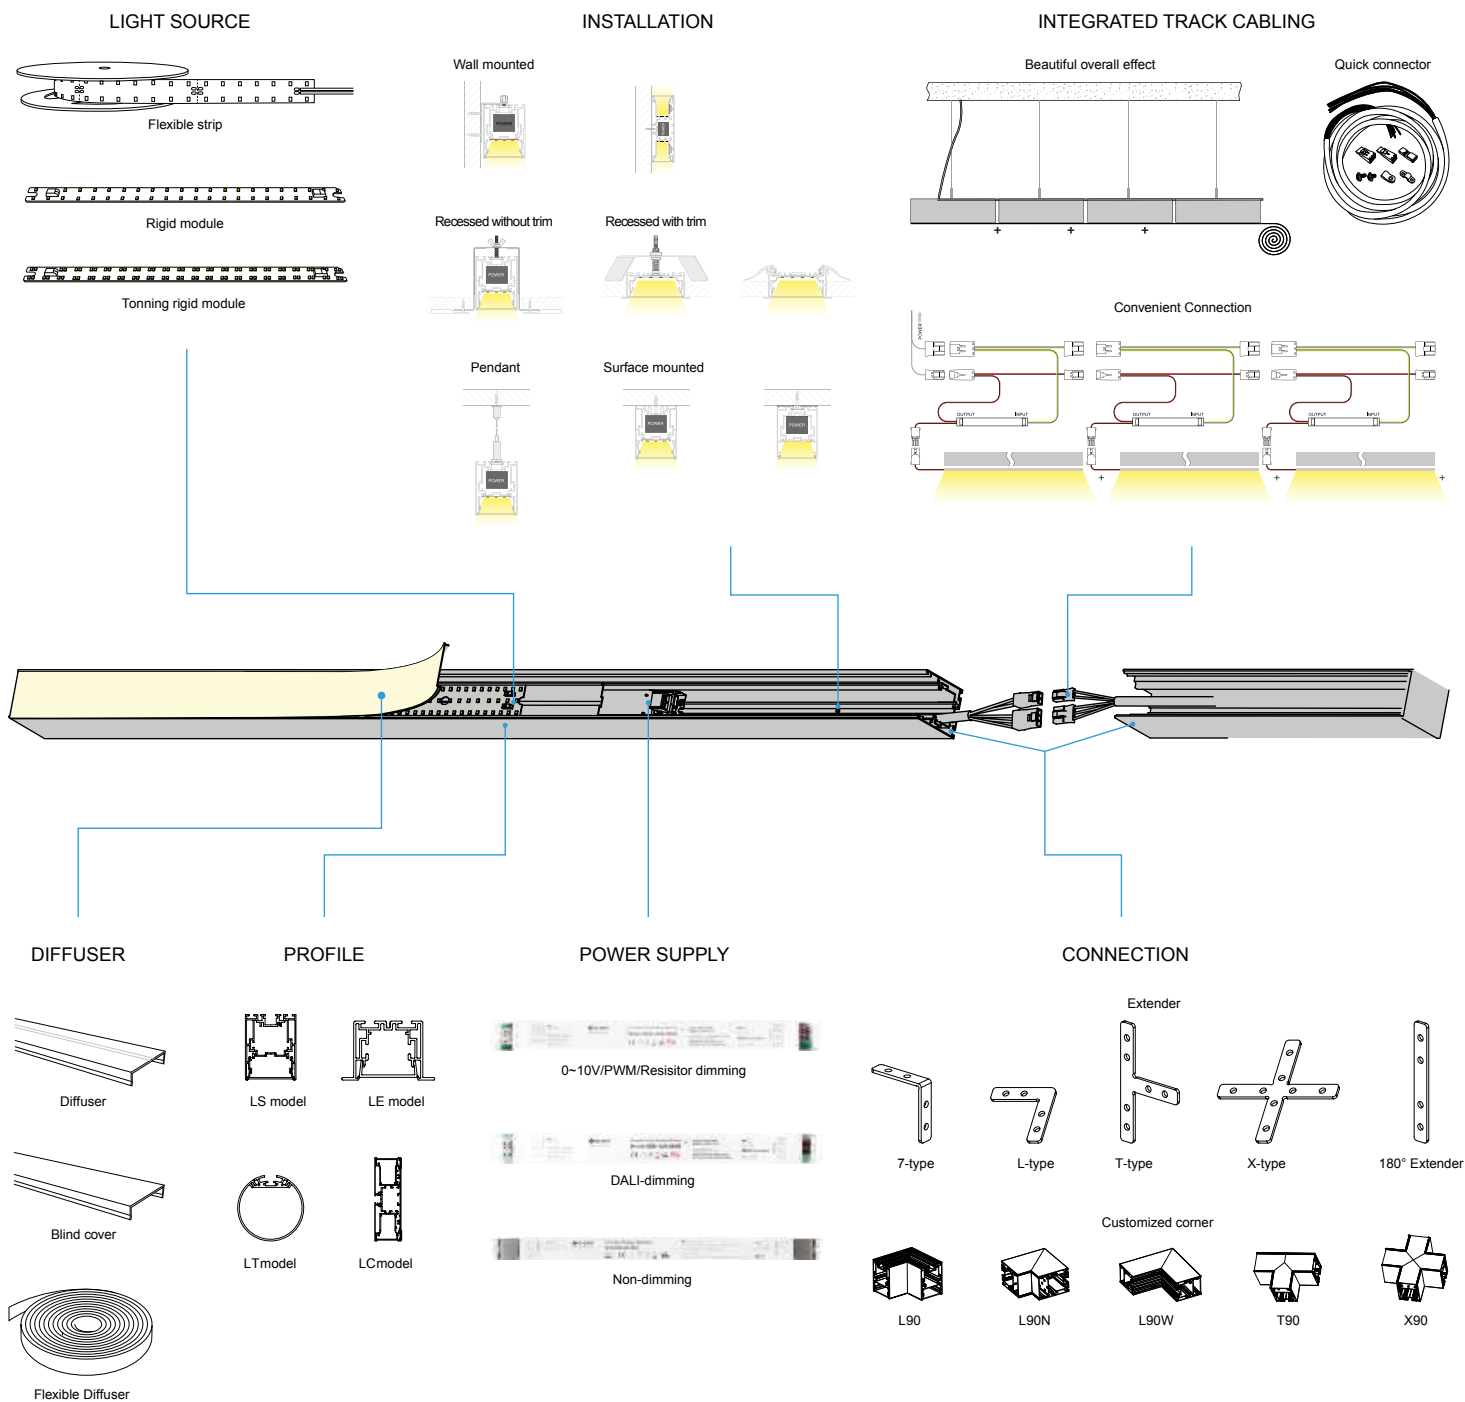

Square 33mm x 60mm



LLS3360

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted




BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☐ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 25W/m (7.62W/FT)
Transmittance	>85%

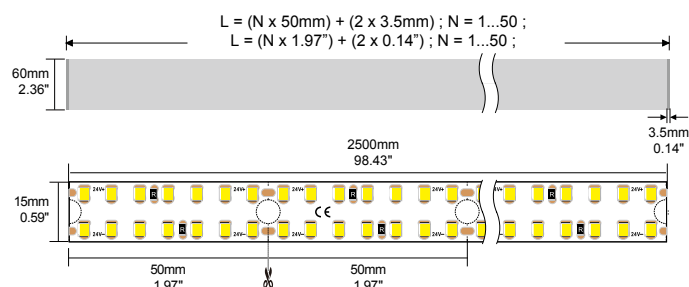

Temperature ambient: 25
LED strip: D8280-24V-15mm(20W/m)



Height	Eavg, Emax	Angle: 109.90deg	Diameter
1m	131.6, 419.6lx		285.10cm
2m	32.91, 104.9lx		570.20cm
3m	14.63, 46.62lx		855.30cm
5m	5.265, 16.78lx		1425.49cm
7m	2.686, 8.562lx		1995.69cm





1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Square 40mm x 67mm



LLS4067

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted

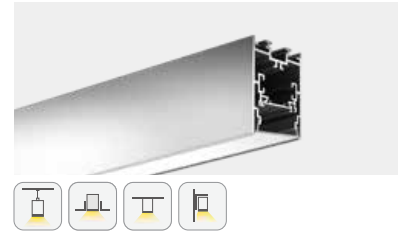



BASIC PARAMETERS


Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 25W/m (7.62W/FT)		
Transmittance	>85%		

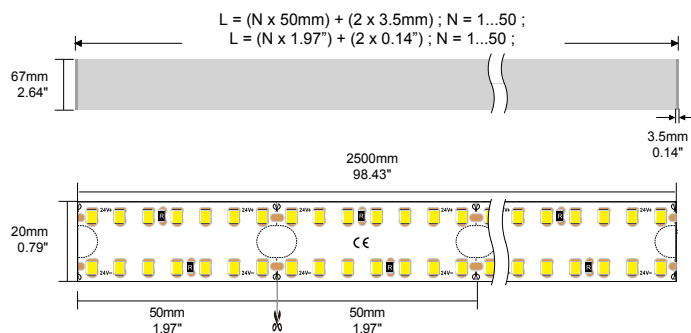

Temperature ambient: 25
LED strip: D8280-24V-20mm(20W/m)

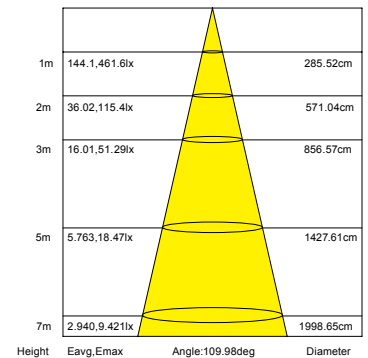




1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K

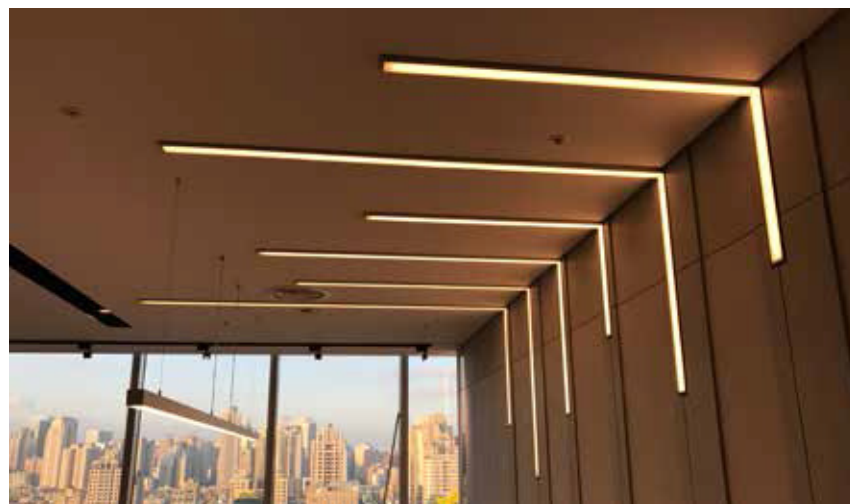

Square 54mm x 70mm


LLS5470(F)

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- 50m/roll flexible diffuser, PC diffuser, aluminium blind diffuser
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted

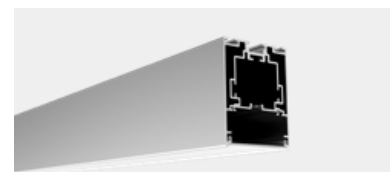



BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 38W/m (11.58W/FT)
Transmittance	>85%

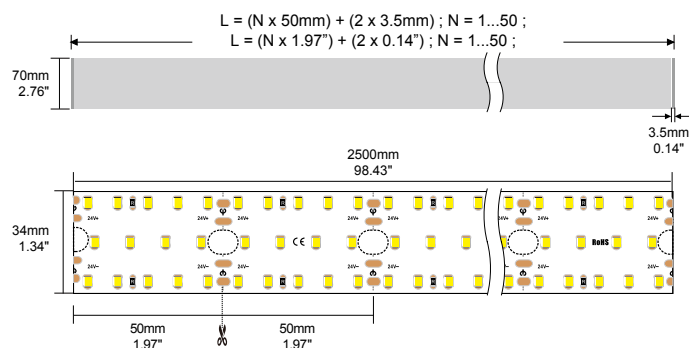

Temperature ambient: 25°C
LED strip: D8280-24V-34mm(25W/m)



Height	Eavg, Emax	Angle: 104.30deg	Diameter
1m	242.2, 735.4lx		257.38cm
2m	60.55, 183.8lx		514.76cm
3m	26.91, 81.71lx		772.13cm
5m	9.688, 29.42lx		1286.89cm
7m	4.943, 15.01lx		1801.64cm





1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Square 79mm x 77mm


LLS7977

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted


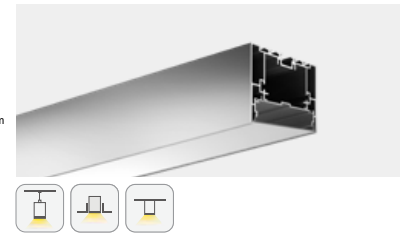
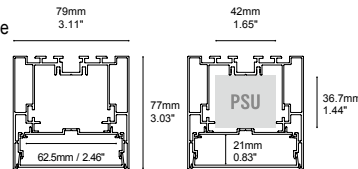


BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 42W/m (12.80W/FT)		
Transmittance	>85%		

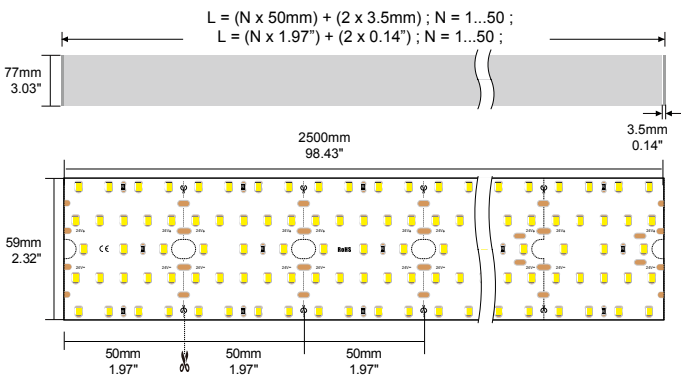

Temperature ambient: 25°C
LED strip: D8420-24V-59mm(30W/m)



Height	Eavg, Emax	Angle: 111.64deg	Diameter
1m	284.4, 962.0lx		294.53cm
2m	71.10, 240.5lx		589.07cm
3m	31.60, 106.9lx		883.60cm
5m	11.38, 38.48lx		1472.66cm
7m	5.804, 19.63lx		2061.73cm



1900 K ☐ 2300 K ☐ 2700 K ☐ 3000 K ☐ 3500 K ☐ 4000 K ☐ 5000 K ☐ 6000 K ☐



Square 105mm x 70mm


LLS10570

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted


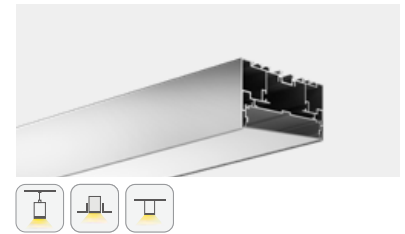



BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 63W/m (19.20W/FT)		
Transmittance	>85%		

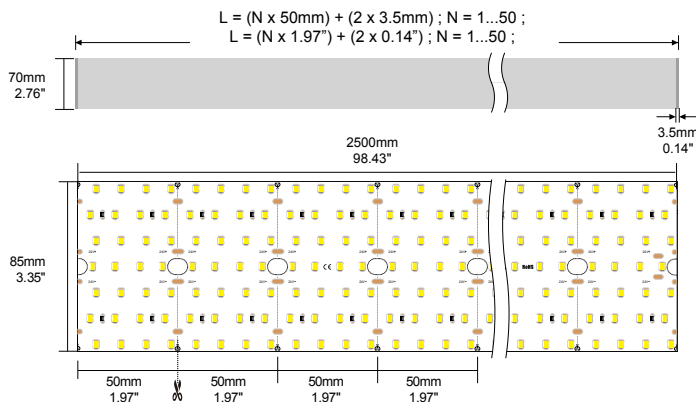

Temperature ambient: 25°C
LED strip: D8560-24V-85mm(40W/m)

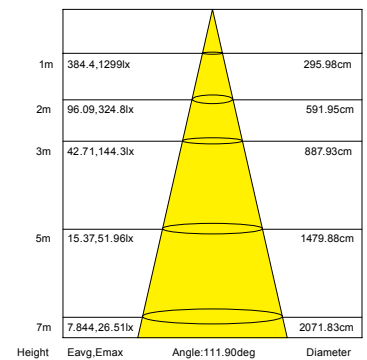


1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Square 123mm x 35mm


LLS12335

- 120mm large luminous surface, high brightness output
- PC diffuser imported from Germany, producing homogenous & softlighting
- Luminaires interconnection can be realized, convenient installation
- Various installation ways: pendant, recessed and surface mounted


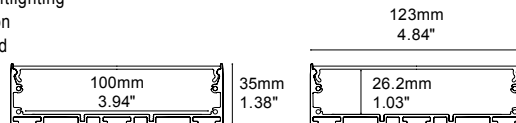


BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 50W/m (15.24W/FT)		
Transmittance	>85%		

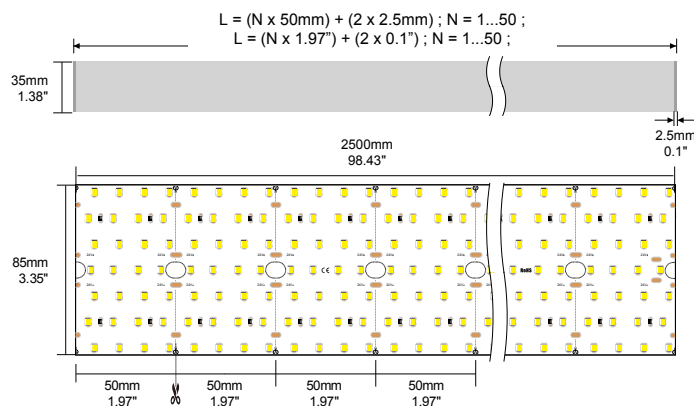

Temperature ambient: 25°C
LED strip: D8560-24V-85mm(40W/m)

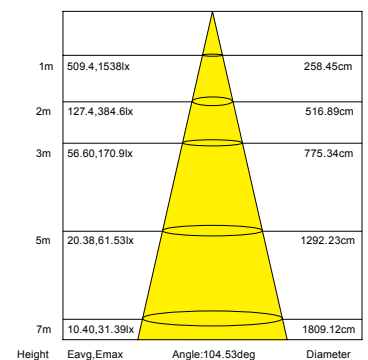


1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Recessed 55mm x 35mm


LLE5535

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016






BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 33W/m (10.06W/FT)		
Transmittance	>85%		

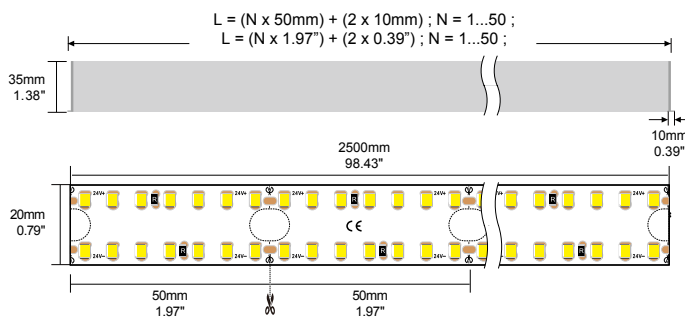


Temperature ambient: 25°C
LED strip: D8280-24V-20mm(20W/m)



Height	Eavg, Emax	Angle: 110.79deg	Diameter
1m	111.9, 375.0lx		289.86cm
2m	27.97, 93.76lx		579.72cm
3m	12.43, 41.67lx		869.58cm
5m	4.476, 15.00lx		1449.30cm
7m	2.284, 7.654lx		2029.02cm



1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K

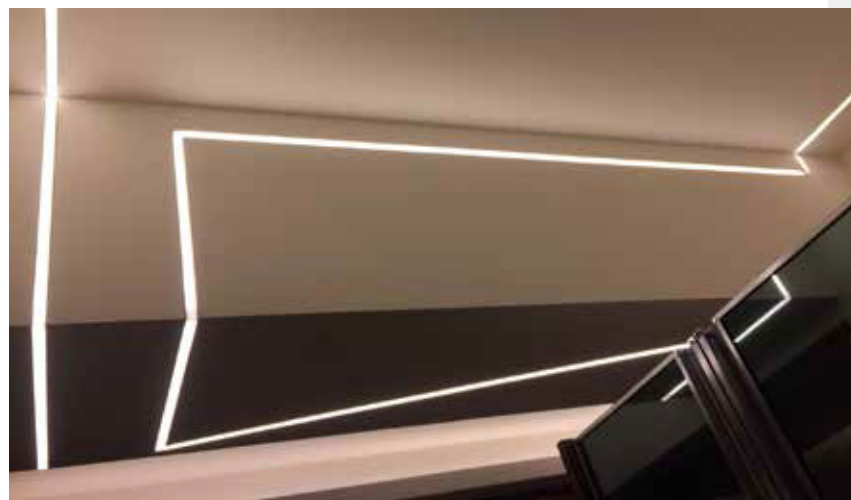

Recessed 69mm x 35mm



LLE6935

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

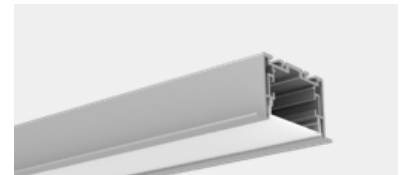

BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 38W/m (11.58W/FT)		
Transmittance	>85%		

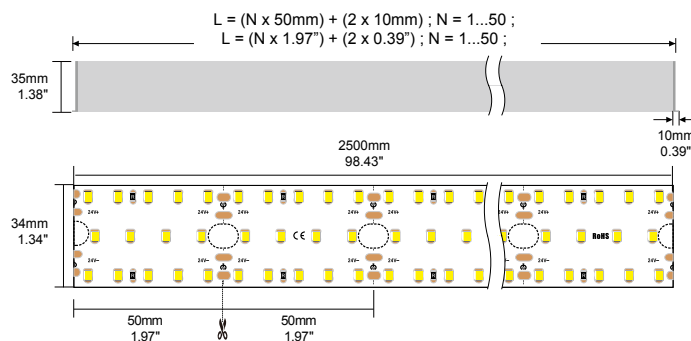



Temperature ambient: 25C°
LED strip: D8280-24V-34mm(25W/m)



Height	Eavg, Emax	Angle: 102.62deg	Diameter
1m	246.6, 714.0lx		249.73cm
2m	61.64, 178.5lx		499.47cm
3m	27.40, 79.33lx		749.20cm
5m	9.862, 28.56lx		1248.67cm
7m	5.032, 14.57lx		1748.14cm


1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K

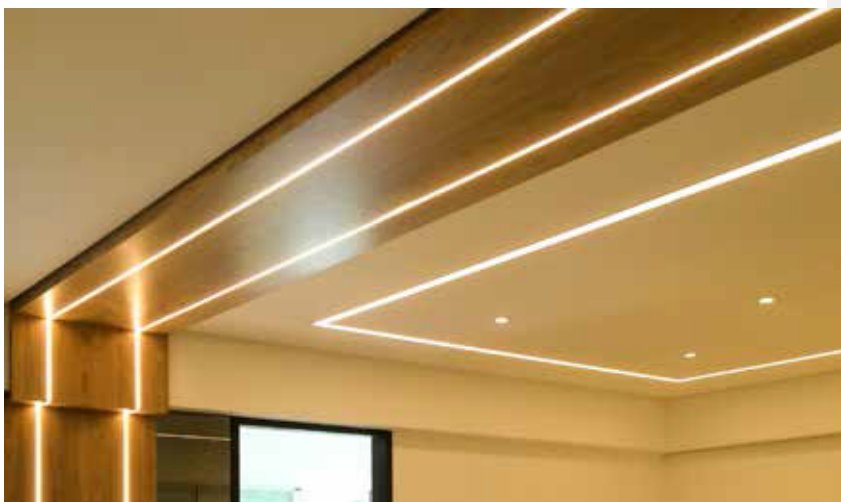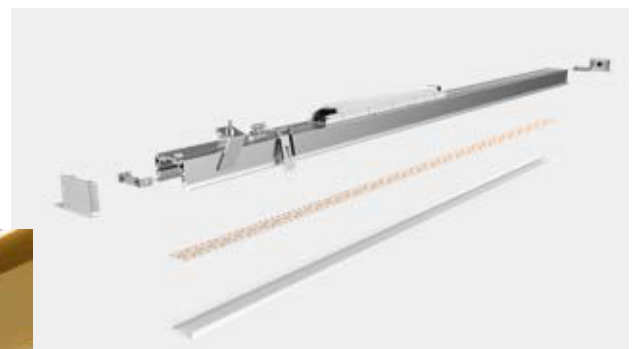

Recessed 94mm x 35mm


LLE9435

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016





BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 50W/m (15.24W/FT)
Transmittance	>85%

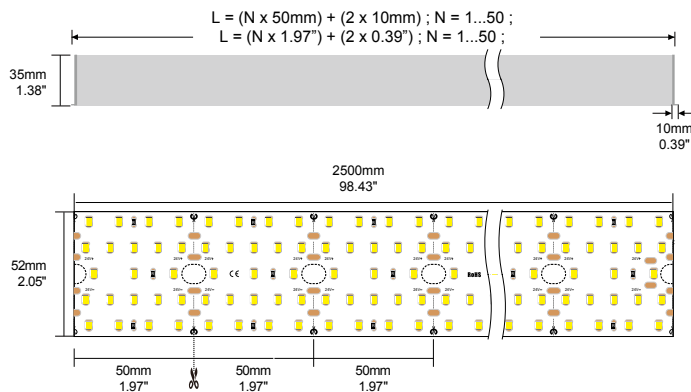

Temperature ambient: 25C°
LED strip: D8420-24V-52mm(30W/m)



Height	Eavg, Emax	Angle: 111.57deg	Diameter
1m	269.7, 902.8lx		294.12cm
2m	67.41, 225.7lx		588.24cm
3m	29.96, 100.3lx		882.37cm
5m	10.79, 36.11lx		1470.61cm
7m	5.503, 18.42lx		2058.86cm


1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Wall Mount 128mm x 43mm


LLC12843

- Wall-mounted & double-sided, directional lighting upward & downward, flexibly fit in different lighting applications
- Creative magnetic end cap, connect in seconds
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful




BASIC PARAMETERS


Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☒
Diffuser material	PC
Heat dissipation capability	Max 63W/m (19.2W/FT)
Transmittance	>85%

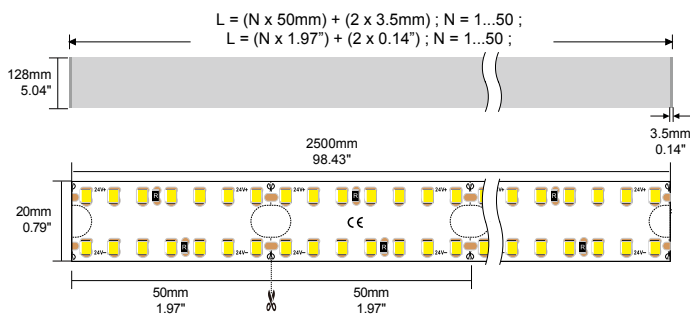

Temperature ambient: 25C°
LED strip: D8280-24V-20mm(20W/m)

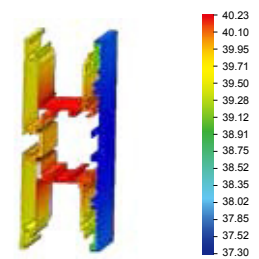


PHOTOMETRIC OF 1.2M

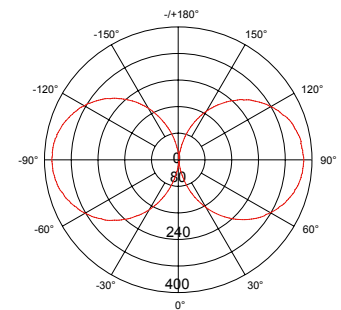

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K





1m	40.23,89.07lx	200.00cm
2m	10.06,22.27lx	400.00cm
3m	4.470,9.896lx	600.00cm
5m	1.609,3.563lx	1000.00cm
7m	0.8210,1.818lx	1400.00cm
Height	Eavg,Emax	Angle:90.00deg Diameter

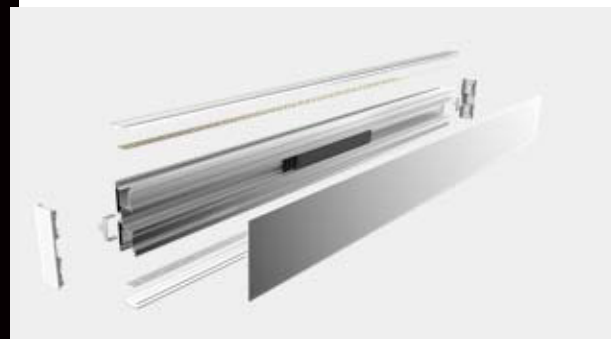

Tube 60mm



LLT60

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

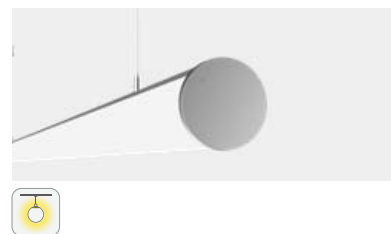

BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 25W/m (7.62W/FT)		
Transmittance	>85%		

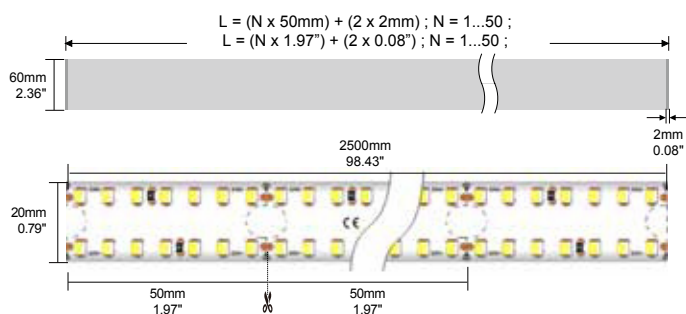

Height	Eavg, Emax	Angle: 107.65deg	Diameter
1m	141.1, 393.7lx		273.53cm
2m	35.27, 98.42lx		547.06cm
3m	15.68, 43.74lx		820.59cm
5m	5.64, 15.75lx		1367.65cm
7m	2.87, 8.03lx		1914.71cm



1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Tube 90mm



LLT90

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black,white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space
- Built-in linear power supply, invisible and beautiful
- Two installation ways: pendant and surface mounted

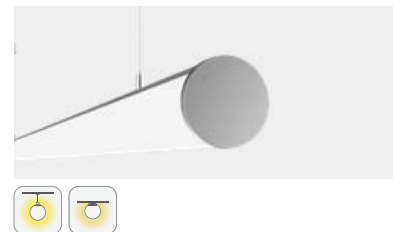

BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 30W/m (9.14W/FT)		
Transmittance	>85%		

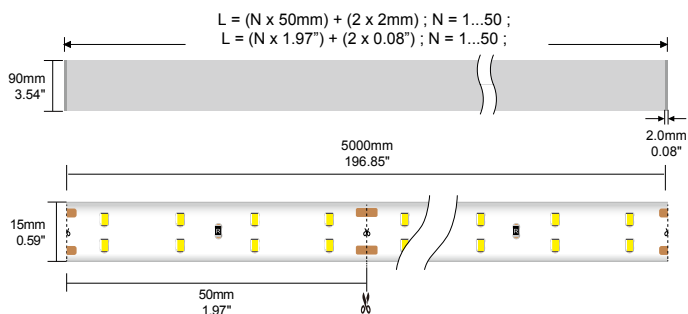

Height	Eavg,Emax	Angle:112.77deg	Diameter
1m	134.5,416.7lx		300.88cm
2m	33.64,104.2lx		601.75cm
3m	14.95,46.30lx		902.63cm
5m	5.382,16.67lx		1504.38cm
7m	2.746,8.503lx		2106.13cm



1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



Tube 120mm



LLT120

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

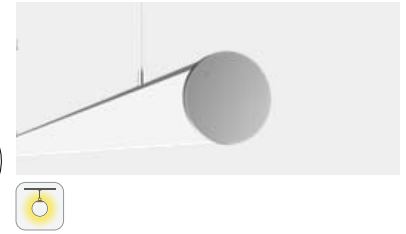

BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 30W/m (9.14W/FT)		
Transmittance	>85%		

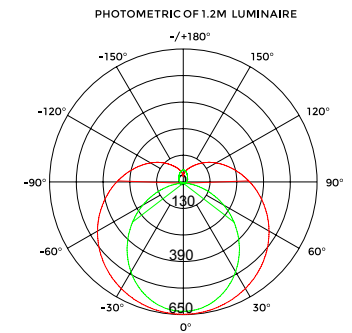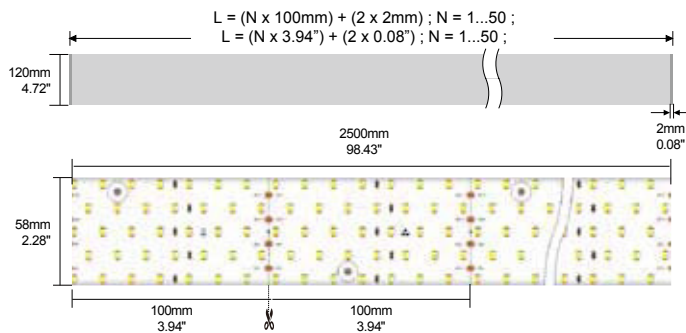

Height	Eavg, Emax	Angle: 103.43deg	Diameter
1m	247.0, 645.3lx		253.39cm
2m	61.74, 161.3lx		506.78cm
3m	27.44, 71.70lx		760.17cm
5m	9.878, 25.81lx		1266.96cm
7m	5.040, 13.17lx		1773.74cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



NES Light

SMART SOLUTION

1179 Edgewater Ave. Ridgefield, NJ 07657 / Tel : (201) 840-0400 / neslight@gmail.com / info@neslight.com

