

2019
Lumi Lighting
www.neslight.com

**NES Light**
CUSTOM LED SOLUTION



Lumi Lighting



Lumi Lighting is iterated and upgraded based on the Linear LED Light design with more corner accessories added to achieve more creative styles.

CONTENTS


























P3. Product List	P11. LLS 10570
P4. Lumi Lighting info	P12. LLS 12335
P5. Installation	P13. LLE 5535
P6. Linear Lighting Solution	P14. LLE 6935
P7. LLS 3360	P15. LLE 9435
P8. LLS 4067	P16. LLC 12843
P9. LLS 5470(F)	P17. LLT 60
P10. LLS 7977	P18. LLT 90
	P19. LLT 120




Since its establishment in 2002, NES Light has been concentrating on research and development in this cutting-edge technology and here you will find cost-effective and environment friendly lighting solutions (LED lamps use 80% to 90% less energy than the incandescent lamps they replace). Our goal is to save our environment and provide low cost with high quality LEDs to our customers. Also, we are ready for your custom applications. All executives and employees of NES Light are proud of our products and promise you our best to fit your needs. Our LEDs, - Low Voltage and electric currency product saves power more than 80% compare to Neon.



Product List


Series	Model	Drawing	size (inch)	Installation	Coating	Standard extender	Customizable corners	CCT				Flexible strip
LLS	LLS3360		1.3 × 2.36 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -0.6"
	LLS4067		1.57 × 2.63 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -0.78"
	NEW LLS5470(F)		2.12 × 2.75 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -1.33"
	LLS7977		3.1 × 3 × 98.4					1900 K	2300 K	2700 K	3000 K	D8420-24V -2.32"
	LLS10570		4.13 × 2.75 × 98.4					1900 K	2300 K	2700 K	3000 K	D8560-24V -3.34"
	NEW LLS12335		4.84 × 1.37 × 98.4					1900 K	2300 K	2700 K	3000 K	D8560-24V -3.34"
LLE	LLE5535		2.16 × 1.37 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -0.78"
	LLE6935		2.7 × 1.37 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -1.33"
	LLE9435		3.7 × 1.37 × 98.4					1900 K	2300 K	2700 K	3000 K	D8420-24V -2.04"
LLC	LLC12843		5.04 × 1.69 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -0.78"
LLT	LLT60		φ 2.36 × 98.4					1900 K	2300 K	2700 K	3000 K	D8280-24V -0.78"
	LLT90		φ 3.54 × 98.4					1900 K	2300 K	2700 K	3000 K	D8160-24V -0.59"
	LLT120		φ 4.72 × 98.4					1900 K	2300 K	2700 K	3000 K	D8350-24V -2.28"

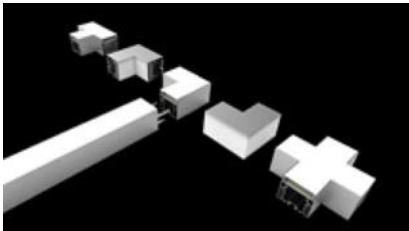


Connectors:
Multiple optional standard connectors, and any other special angle (L-shape, T-shape, X-shape and wide angles) can be customized; Seamless connection with appealing design.



Flexible Diffuser:
Flexible diffuser, 50m/roll, cutting freely, ultra-long application without connection gap.

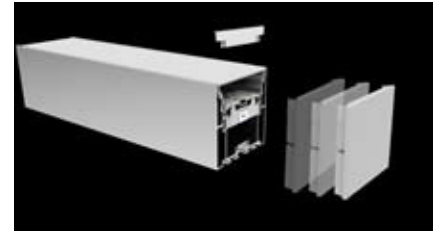

Magnetic End Cap:
Magnetic absorption design, connect in seconds; Minimalist and trendy appearance without screws.

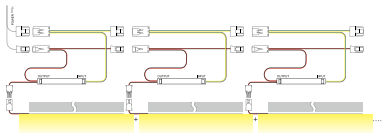


Integrated Track Cabling:
After using integrated track cabling, during the ultra-long interconnection, electrical connection can be completed through the insertion of the inner connectors, without multiple wires exposed to the outside, beautiful overall effect.




Professional Matching Tool:
Professional matching tool of diffuser installing, using for ultra-long application of pendant, surface mounted, save time and complete easily.

Installation

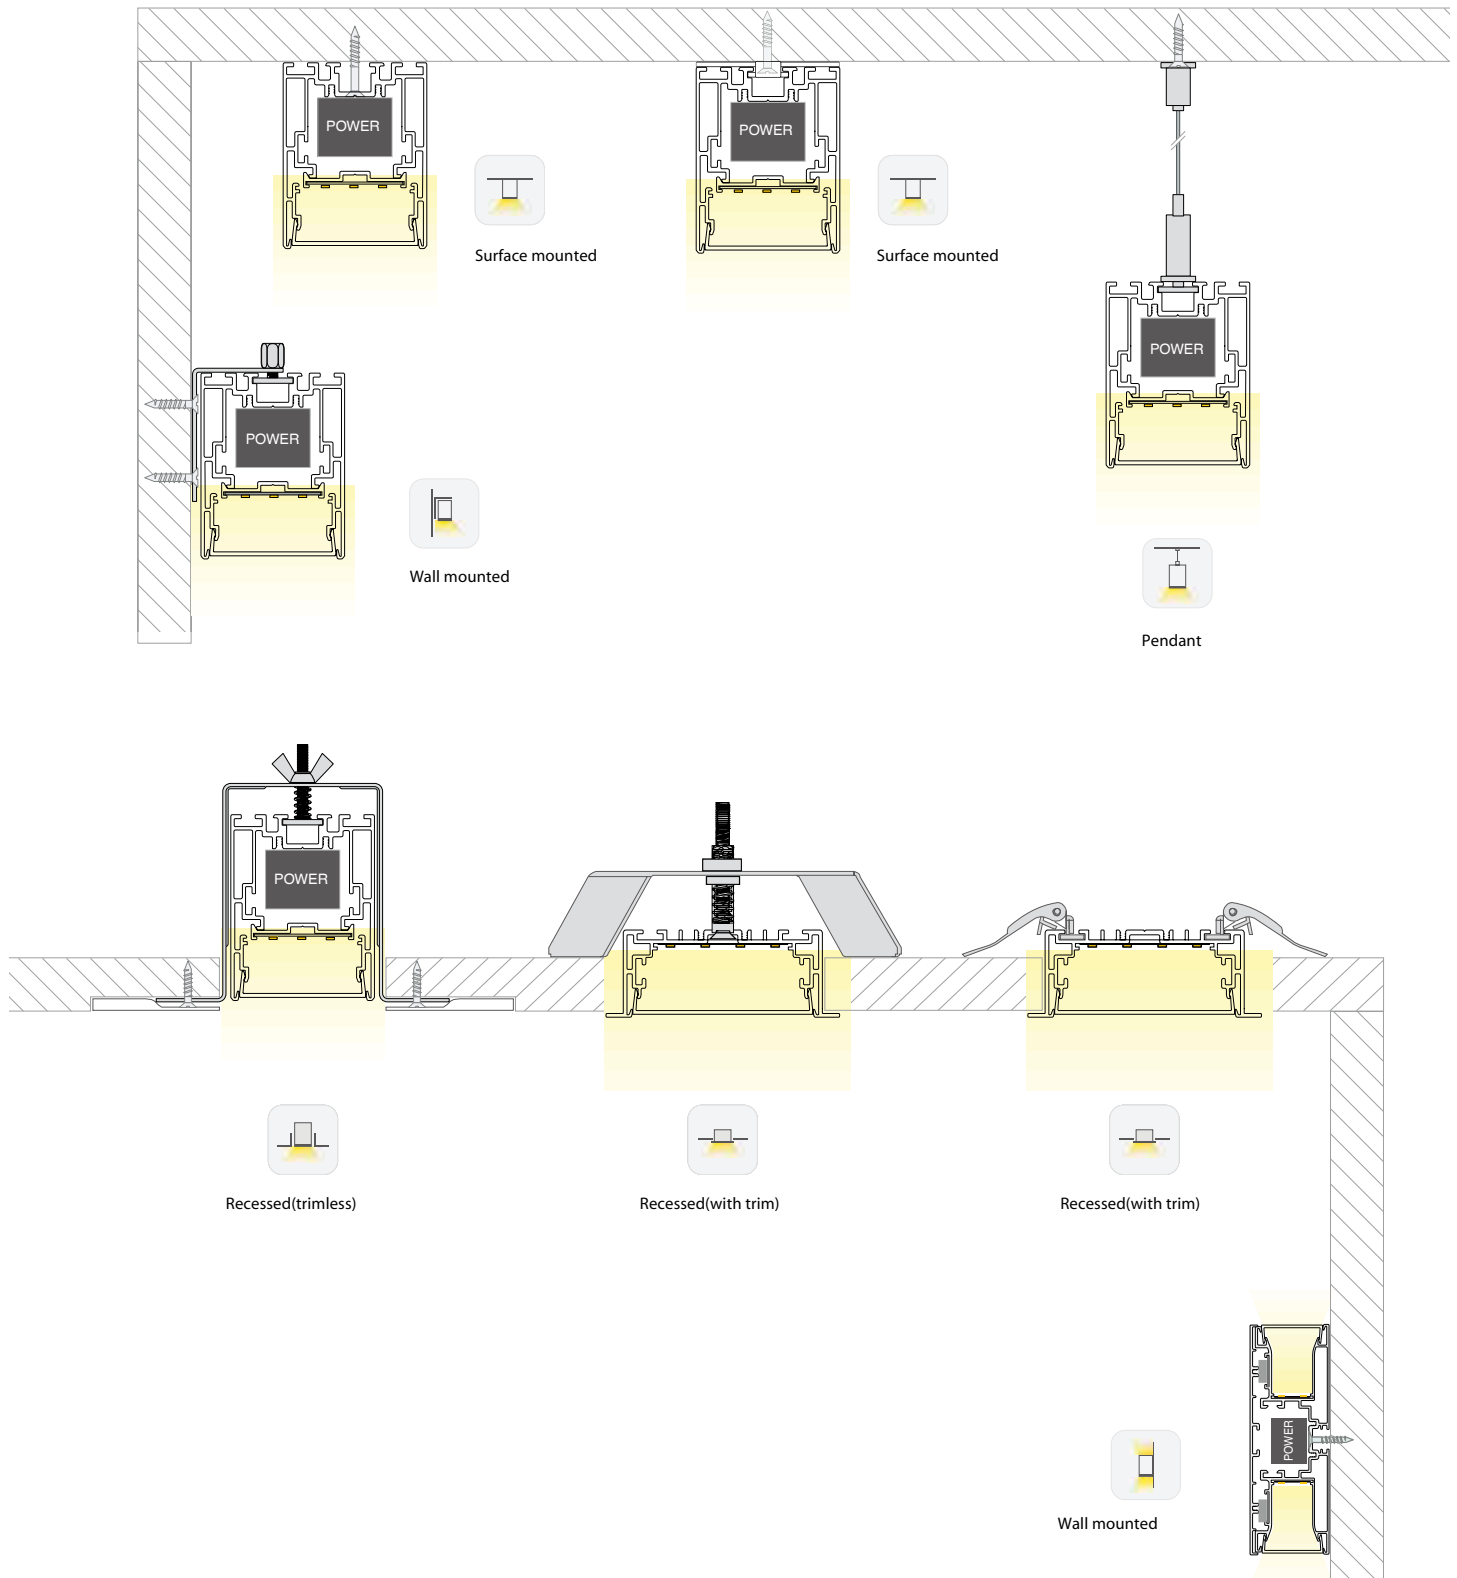


Linear Lighting Solution

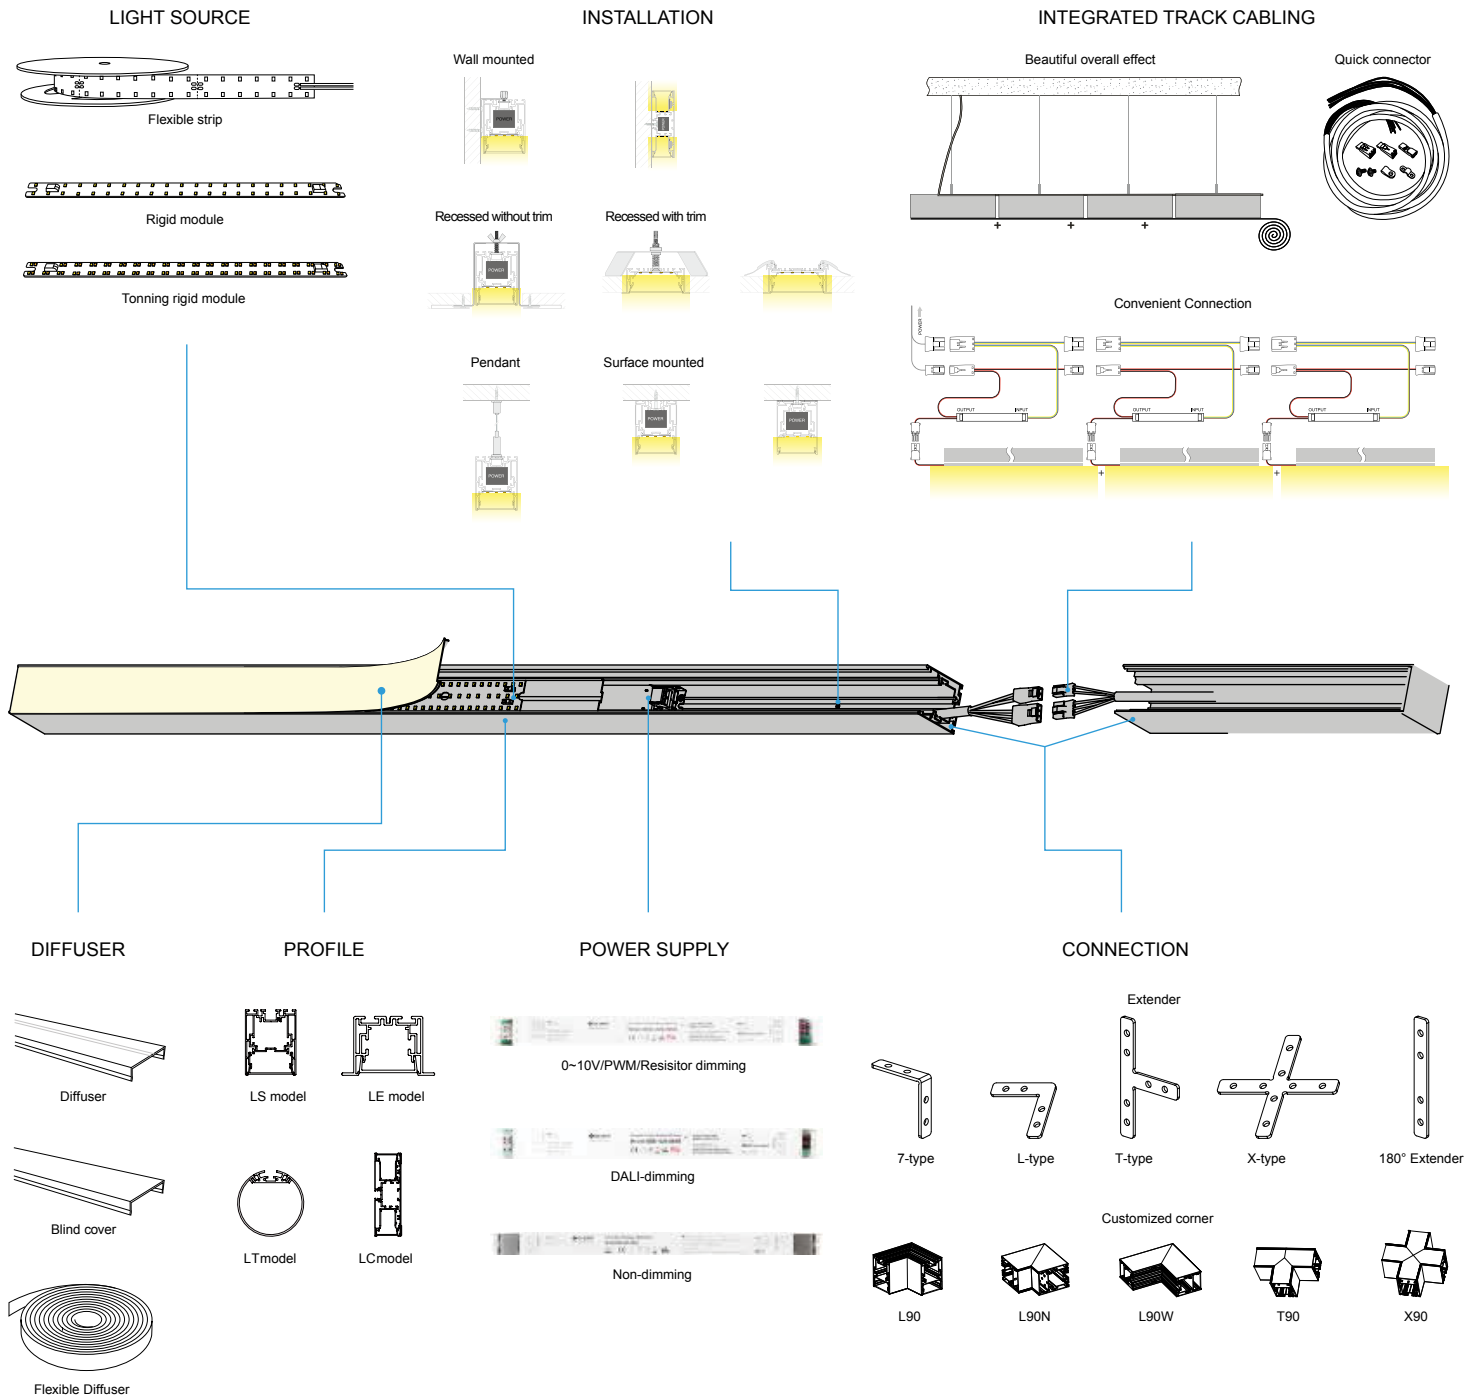



LLS3360

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted




BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 25W/m (7.62W/FT)		
Transmittance	>85%		

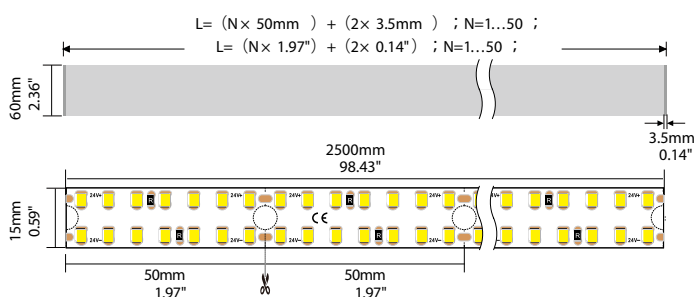

Temperature ambient: 25
LED strip: DB280-24V-15mm(20W/m)





Height	Eavg,Emax	Angle:109.90deg	Diameter
1m	131.6,419.6lx		285.10cm
2m	32.91,104.9lx		570.20cm
3m	14.63,46.62lx		855.30cm
5m	5.265,16.78lx		1425.49cm
7m	2.686,8.562lx		1995.69cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K





LLS4067

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted

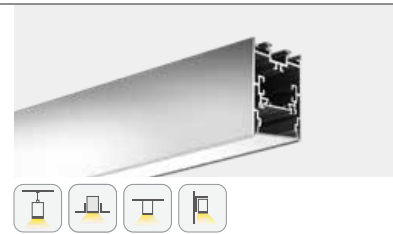


BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 25W/m (7.62W/FT)		
Transmittance	>85%		

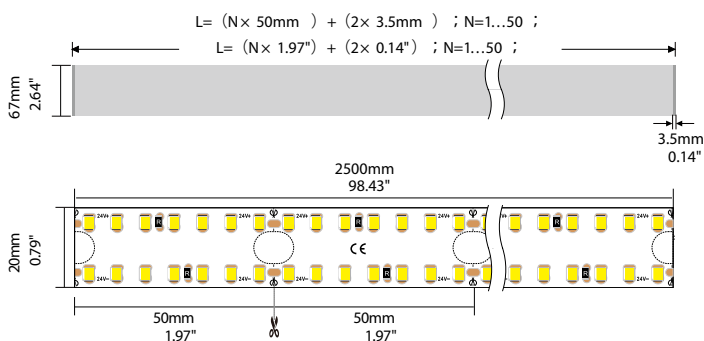


Temperature ambient: 25
LED strip: D8280-24V-20mm(20W/m)





Height	Eavg,Emax	Angle:109.98deg	Diameter
1m	144.1,461.6lx		285.52cm
2m	36.02,115.4lx		571.04cm
3m	16.01,51.29lx		856.57cm
5m	5.763,18.47lx		1427.61cm
7m	2.940,9.421lx		1998.65cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K

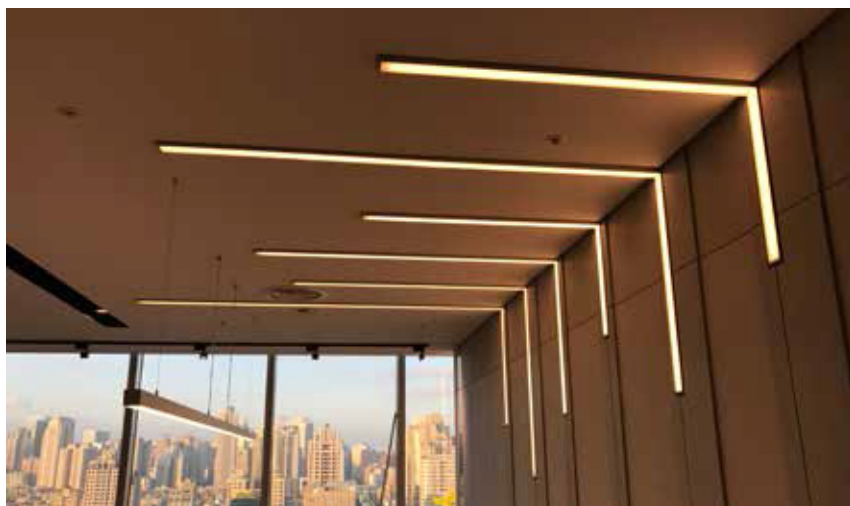


LLS5470(F)

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- 50m/roll flexible diffuser, PC diffuser, aluminium blind diffuser
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed, surface and wall mounted


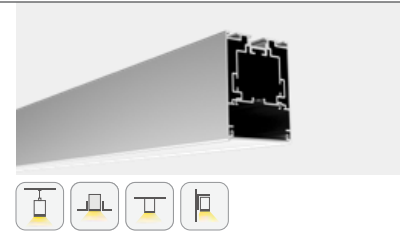
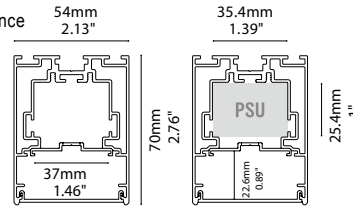


BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☐ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 38W/m (11.58W/FT)
Transmittance	>85%

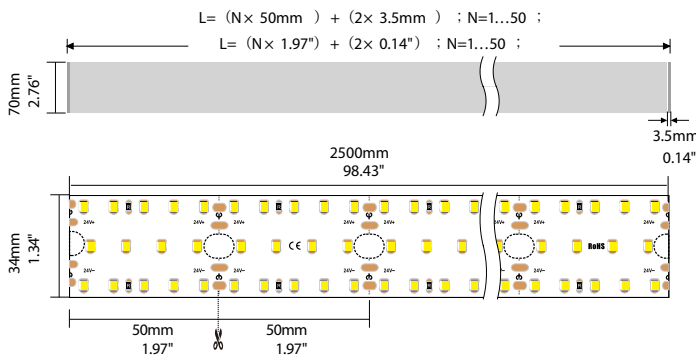

Temperature ambient: 25°C
LED strip: D8280-24V-34mm(25W/m)





Height	Eavg, Emax	Angle: 104.30deg	Diameter
1m	242.2, 735.4lx		257.38cm
2m	60.55, 183.8lx		514.76cm
3m	26.91, 81.71lx		772.13cm
5m	9.688, 29.42lx		1286.89cm
7m	4.943, 15.01lx		1801.64cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K




LLS7977

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted

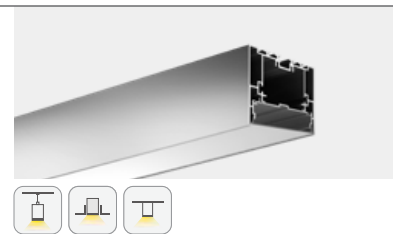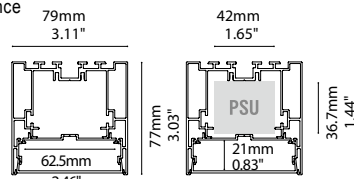


BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☒
Diffuser material	PC
Heat dissipation capability	Max 42W/m (12.80W/FT)
Transmittance	>85%

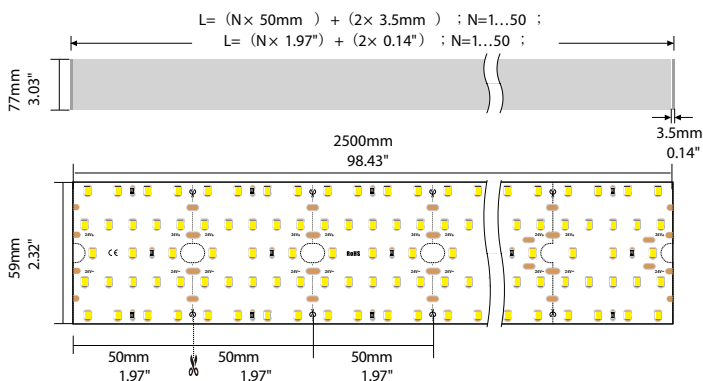

Temperature ambient: 25C°
LED strip: D8420-24V-59mm(30W/m)






Height	Eavg,Emax	Angle:111.64deg	Diameter
1m	284,4,962.0lx		294.53cm
2m	71.10,240.5lx		589.07cm
3m	31.60,106.9lx		883.60cm
5m	11.38,38.48lx		1472.66cm
7m	5.804,19.63lx		2061.73cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K




LLS10570

- Creative magnetic end cap, connect in seconds
- Designed in creative carrier buckle extremely convenient for installation and maintenance
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful
- Various installation ways: pendant, recessed and surface mounted

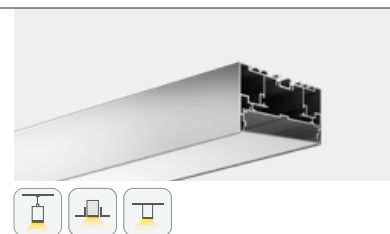
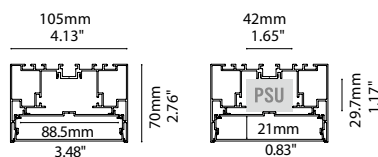


BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☐ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 63W/m (19.20W/FT)
Transmittance	>85%

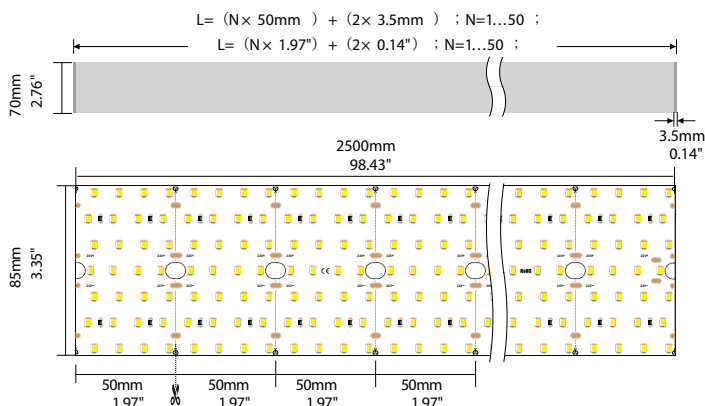

Temperature ambient: 25C°
LED strip: D8560-24V-85mm(40W/m)

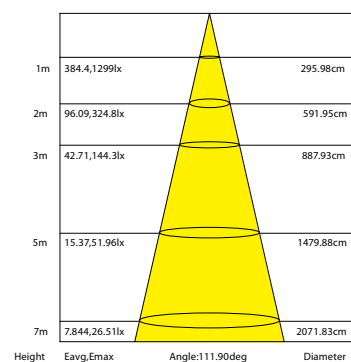



1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K




LLS12335

- 120mm large luminous surface, high brightness output
- PC diffuser imported from Germany, producing homogenous & softlighting
- Luminaires interconnection can be realized, convenient installation
- Various installation ways: pendant, recessed and surface mounted

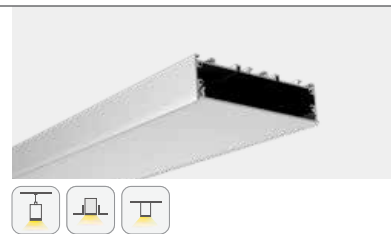
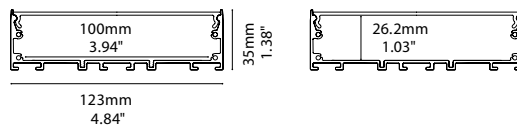


BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 50W/m (15.24W/FT)		
Transmittance	>85%		

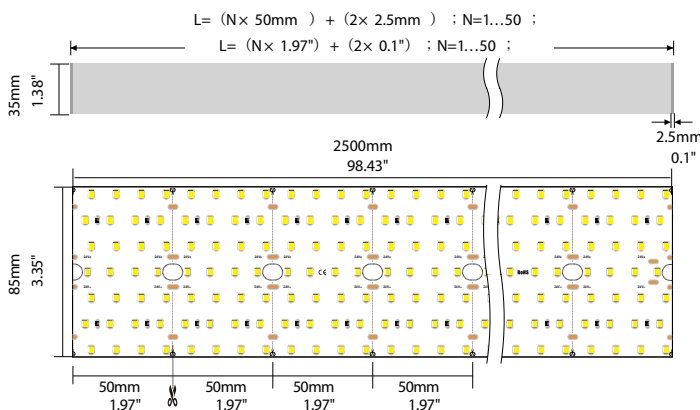


Temperature ambient: 25C°
LED strip: D8560-24V-85mm(40W/m)





Height	Eavg, Emax	Angle: 104.53deg	Diameter
1m	509.4, 1538lx		258.45cm
2m	127.4, 384.6lx		516.89cm
3m	56.60, 170.9lx		775.34cm
5m	20.38, 61.53lx		1292.23cm
7m	10.40, 31.39lx		1809.12cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K

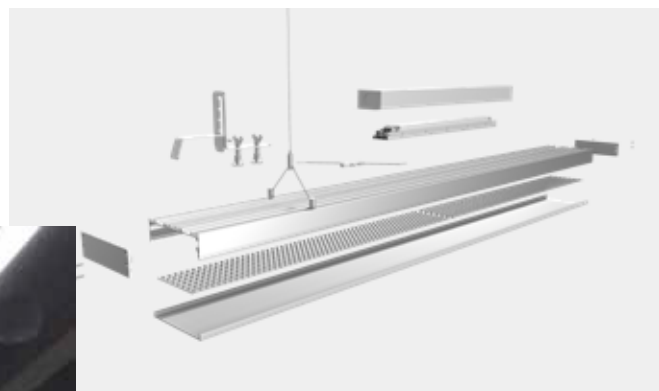


LLE5535

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016

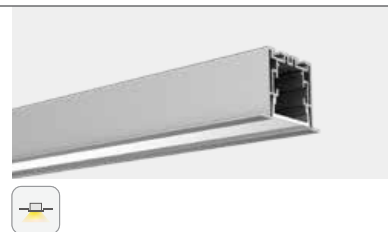



BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 33W/m (10.06W/FT)		
Transmittance	>85%		

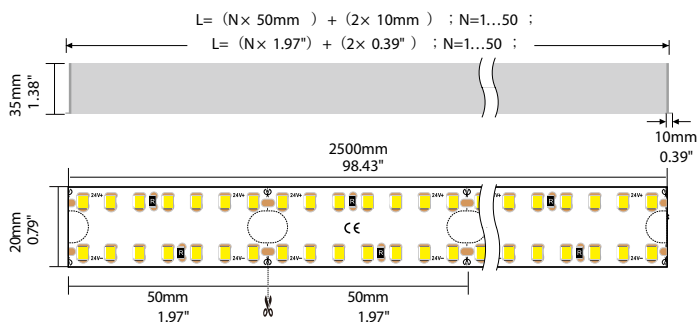


Temperature ambient: 25°C
LED strip: D8280-24V-20mm(20W/m)




Height	Eavg, Emax	Angle: 110.79deg	Diameter
1m	111.9, 375.0lx		289.86cm
2m	27.97, 93.76lx		579.72cm
3m	12.43, 41.67lx		869.58cm
5m	4.476, 15.00lx		1449.30cm
7m	2.284, 7.654lx		2029.02cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K

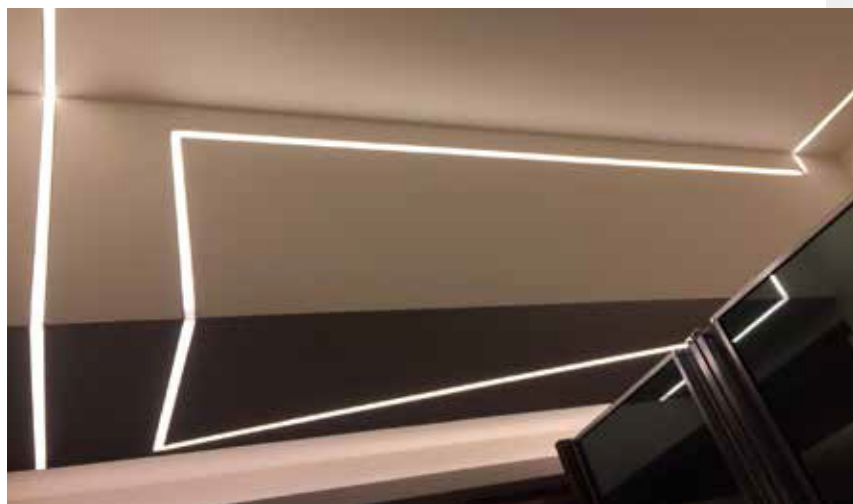


LLE6935

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016



69mm
2.72"




35mm
1.38"





BASIC PARAMETERS



Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 38W/m (11.58W/FT)		
Transmittance	>85%		

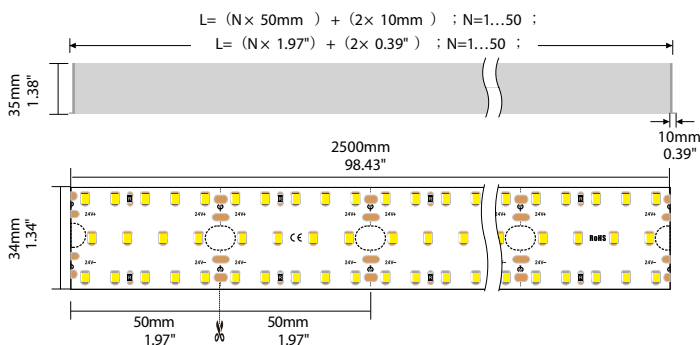

Temperature ambient: 25C°
LED strip: D8280-24V-34mm(25W/m)

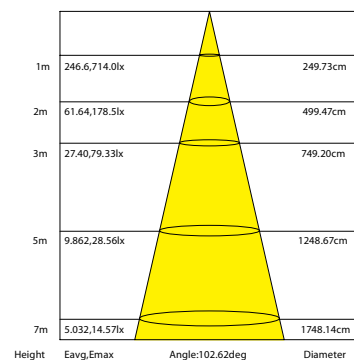


1900 K
 2300 K
 2700 K
 3000 K
 3500 K
 4000 K
 5000 K
 6000 K

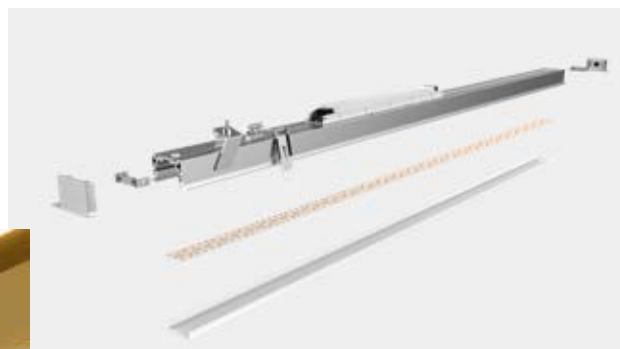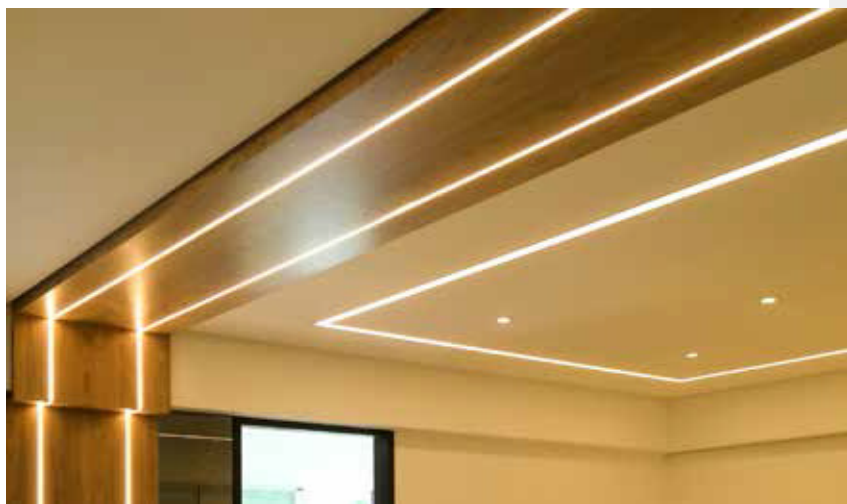


LLE9435

- Creative magnetic end cap, connect in seconds
- Designed in anti-leaky block piece, perfect details
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Recessed installation with two optional accessories of N-shaped buckle and butterfly clip
- Won the IF Design Awards 2016






BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ☐	Spraying RAL9005 ☐	Anodizing ☐
Diffuser material	PC		
Heat dissipation capability	Max 50W/m (15.24W/FT)		
Transmittance	>85%		

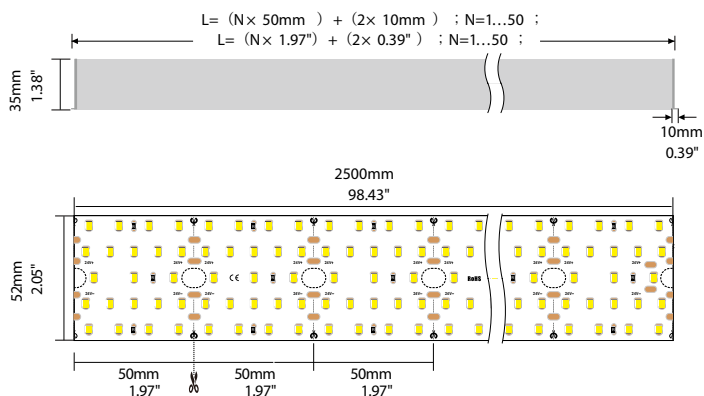

Temperature ambient: 25C°
LED strip: D8420-24V-52mm(30W/m)





Height	Eavg,Emax	Angle:111.57deg	Diameter
1m	269,7,902.8lx		294.12cm
2m	67,41,225.7lx		588.24cm
3m	29,96,100.3lx		882.37cm
5m	10,79,36.11lx		1470.61cm
7m	5,503,18.42lx		2058.86cm

1900 K ☐ 2300 K ☐ 2700 K ☐ 3000 K ☐ 3500 K ☐ 4000 K ☐ 5000 K ☐ 6000 K ☐




LLC12843

- Wall-mounted & double-sided, directional lighting upward & downward, flexibly fit in different lighting applications
- Creative magnetic end cap, connect in seconds
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Provide standard extenders, customizable interconnected corners
- Built-in linear power supply, invisible and beautiful

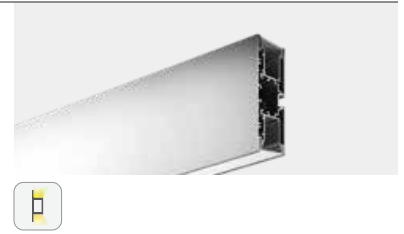


BASIC PARAMETERS


Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 63W/m (19.2W/FT)
Transmittance	>85%

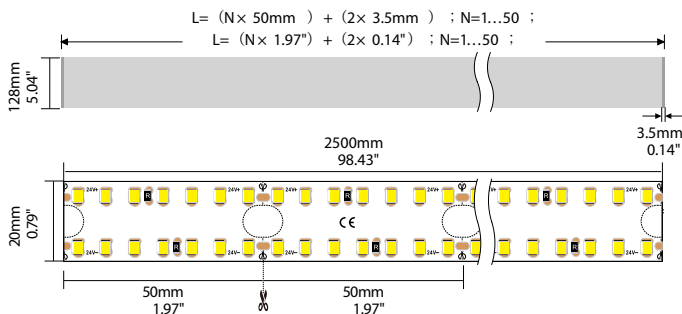

Temperature ambient: 25°C
LED strip: D8280-24V-20mm(20W/m)




PHOTOMETRIC OF 1.2M



1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K




1m	40.23,89.07lx	200.00cm
2m	10.06,22.27lx	400.00cm
3m	4.470,9.896lx	600.00cm
5m	1.609,3.563lx	1000.00cm
7m	0.8210,1.818lx	1400.00cm
Height	Eavg,Emax	Angle:90.00deg Diameter

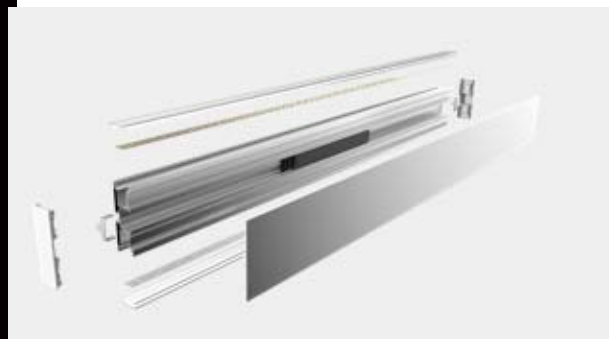

LLT60


- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

60mm
2.36"

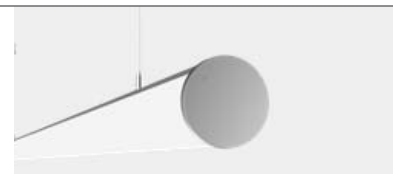


BASIC PARAMETERS

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 ☐ Spraying RAL9005 ☐ Anodizing ☐
Diffuser material	PC
Heat dissipation capability	Max 25W/m (7.62W/FT)
Transmittance	>85%

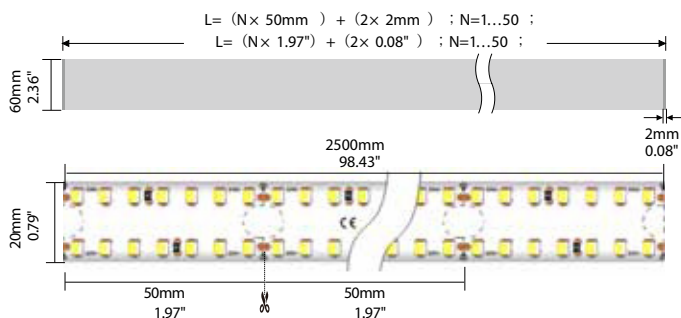

PHOTOMETRIC OF 1.2M LUMINAIRES

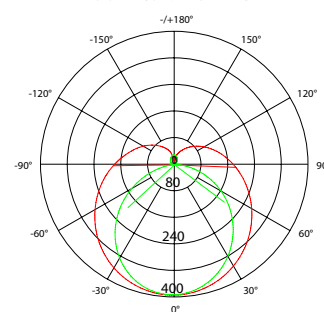



Height	Eavg,Emax	Angle:107.65deg	Diameter
1m	141.1,393.7lx		273.53cm
2m	35.27,98.42lx		547.06cm
3m	15.68,43.74lx		820.59cm
5m	5.643,15.75lx		1367.65cm
7m	2.879,8.034lx		1914.71cm

1900 K ☐ 2300 K ☐ 2700 K ☐ 3000 K ☐ 3500 K ☐ 4000 K ☐ 5000 K ☐ 6000 K ☐





LLT90

- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space
- Built-in linear power supply, invisible and beautiful
- Two installation ways: pendant and surface mounted

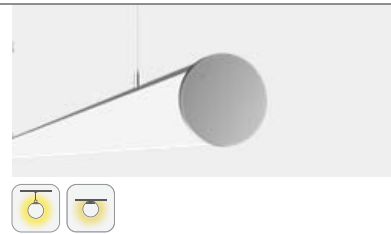

BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 30W/m (9.14W/FT)		
Transmittance	>85%		

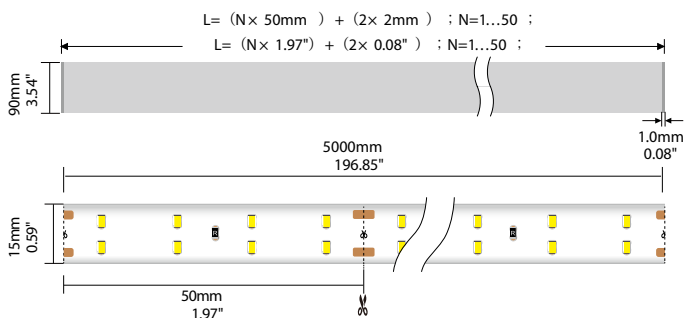

Height	Eavg,Emax	Angle:112.77deg	Diameter
1m	134.5,416.7lx		300.88cm
2m	33.64,104.2lx		601.75cm
3m	14.95,46.30lx		902.63cm
5m	5.382,16.67lx		1504.38cm
7m	2.746,8.503lx		2106.13cm


1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K



LLT90


- Concise, trendy and unique appearance
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- PC diffuser imported from Germany, producing homogenous & soft lighting
- Large light angle delivering better overall lighting effect of space

120mm
4.72"

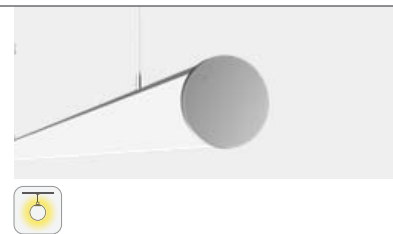


BASIC PARAMETERS

Profile material	AL6063-T5		
Surface processing	Spraying RAL9003 ○	Spraying RAL9005 ●	Anodizing ●
Diffuser material	PC		
Heat dissipation capability	Max 30W/m (9.14W/FT)		
Transmittance	>85%		

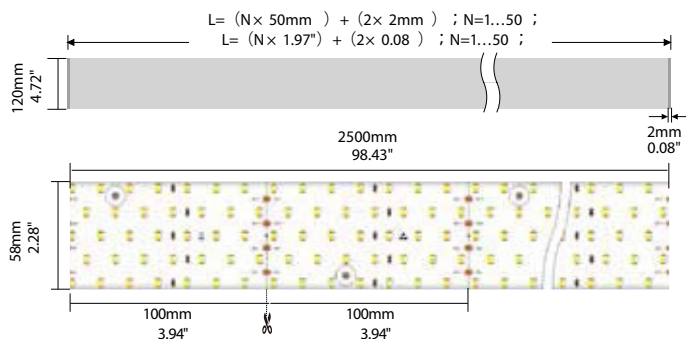

PHOTOMETRIC OF 1.2M LUMINAIRE



Height	Eavg, Emax	Angle: 103.43deg	Diameter
1m	247.0, 645.3lx		253.39cm
2m	61.74, 161.3lx		506.78cm
3m	27.44, 71.70lx		760.17cm
5m	9.878, 25.81lx		1266.96cm
7m	5.040, 13.17lx		1773.74cm

1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K





New Jersey

NES Light INC.
1179 Edgewater Ave. Ridgefield, NJ 07657
Tel : (201) 840-0400
E-mail : neslight@gmail.com
info@neslight.com

Virginia

HIZ SOLUTION INC.
7535 Little River Turnpike #120-C, Annandale, VA 22003
Tel : (703) 898-6836
E-mail : info@hizdesign.com